




## Mutual-Duplicating Remote Control User's Guide

Model No.: R-B04-C

### Brief Introduction

Mutual-Duplicating Remote Control has copy function, can copy any fixed code remote control.

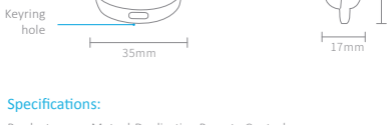

### Specifications:


Product name: Mutual-Duplicating Remote Control  
 Product size: 35x15x65mm  
 Battery: 23A / 12V  
 Model: R-B04-C  
 Working frequency: 433Mhz/315Mhz (optional)  
 Applicable chips: Suitable for all fixed code chips  
 Standard Packaging: Remote control (including batteries), Key ring  
 Application: Various types of Rolling Shutter Door, Retractable Door, Garage Door, Gate, etc

### Operating Instructions:

1. Clear the Code:  
 Press and hold the Open ▲ & Close ▼ keys of the new remote control at the same time, for about three seconds, and the indicator will flash quickly to complete the code clearing. (old remote control does not need code clearing operation)

2. One-key Copy  
 Put closely these two remote controls. The old remote control is on the left, the new remote control is on the right. Press the 2 Pause buttons at the same time, and hold on until the red light of the new remote control flashes. One-key Copy is completed.


#### One-key Copy Diagram



Left: Old Remote Control    Right: New Remote Control

3. Single key copy:  
 Put closely these two remote controls. The old remote control is on the left, the new remote control is on the right. Press the 2 Opening Keys at the same time, until the new remote control's red light flashes and a copy of the key is completed; the other three keys repeat the above steps.

#### Single Key Copy Diagram



Left: Old Remote Control    Right: New Remote Control

Note: One-key copy is compatible with most remote controls. If One-key copy cannot be used or the key function is not correct, clear the code firstly, and then re-operate with single key copy.

### Selection Guide:

Frequency	433	430	418	390	350	315	310
Chip model	PT2260	PT2262	PT2264	PT2240	SC2260	SC2262	CS5211
	HX2260	HX2262	HS2262	EV1527	HS1527	HS2260	FP527
	HX1527	SMC918	AX5026	SMC926	Not available for Secret Code, or Hopping Code remote control		

The following 3 points need to notice when purchasing this Remote Control:

1. First make sure that the old remote control can work properly;
2. Check the crystal frequency of the old remote controller: it determines which model need to purchase;
3. Check the chip model of the old remote control: it determines whether it can be paired.

### Notice:

1. Make sure the old remote control can be used normally before purchasing, and check the crystal frequency and chip type;
2. Mutual-Duplicating Remote Control can only copy Fixed Code remote control, but not Secret Code, Hopping Code remote control (such as HCS201/HCS301);
3. Before using this new remote control to copy, it is important to clear the code of the new remote control.

Please read this manual carefully before using this product!

Shenzhen DreamLnk Technology Co., Ltd  
 Office Add.: Room 603, Unit C, Zone A, Huameiju Business Center, Xinhua Rd., Bao'an District, Shenzhen, Guangdong Province, China  
 TEL.: +86-755-29369047      FAX: +86-755-27844601  
 Mobile: +86 13760215716      Wechat: wsj\_james  
 E-mail: james@dreamlnk.com      Web: www.iot-rf.com