


ROHS

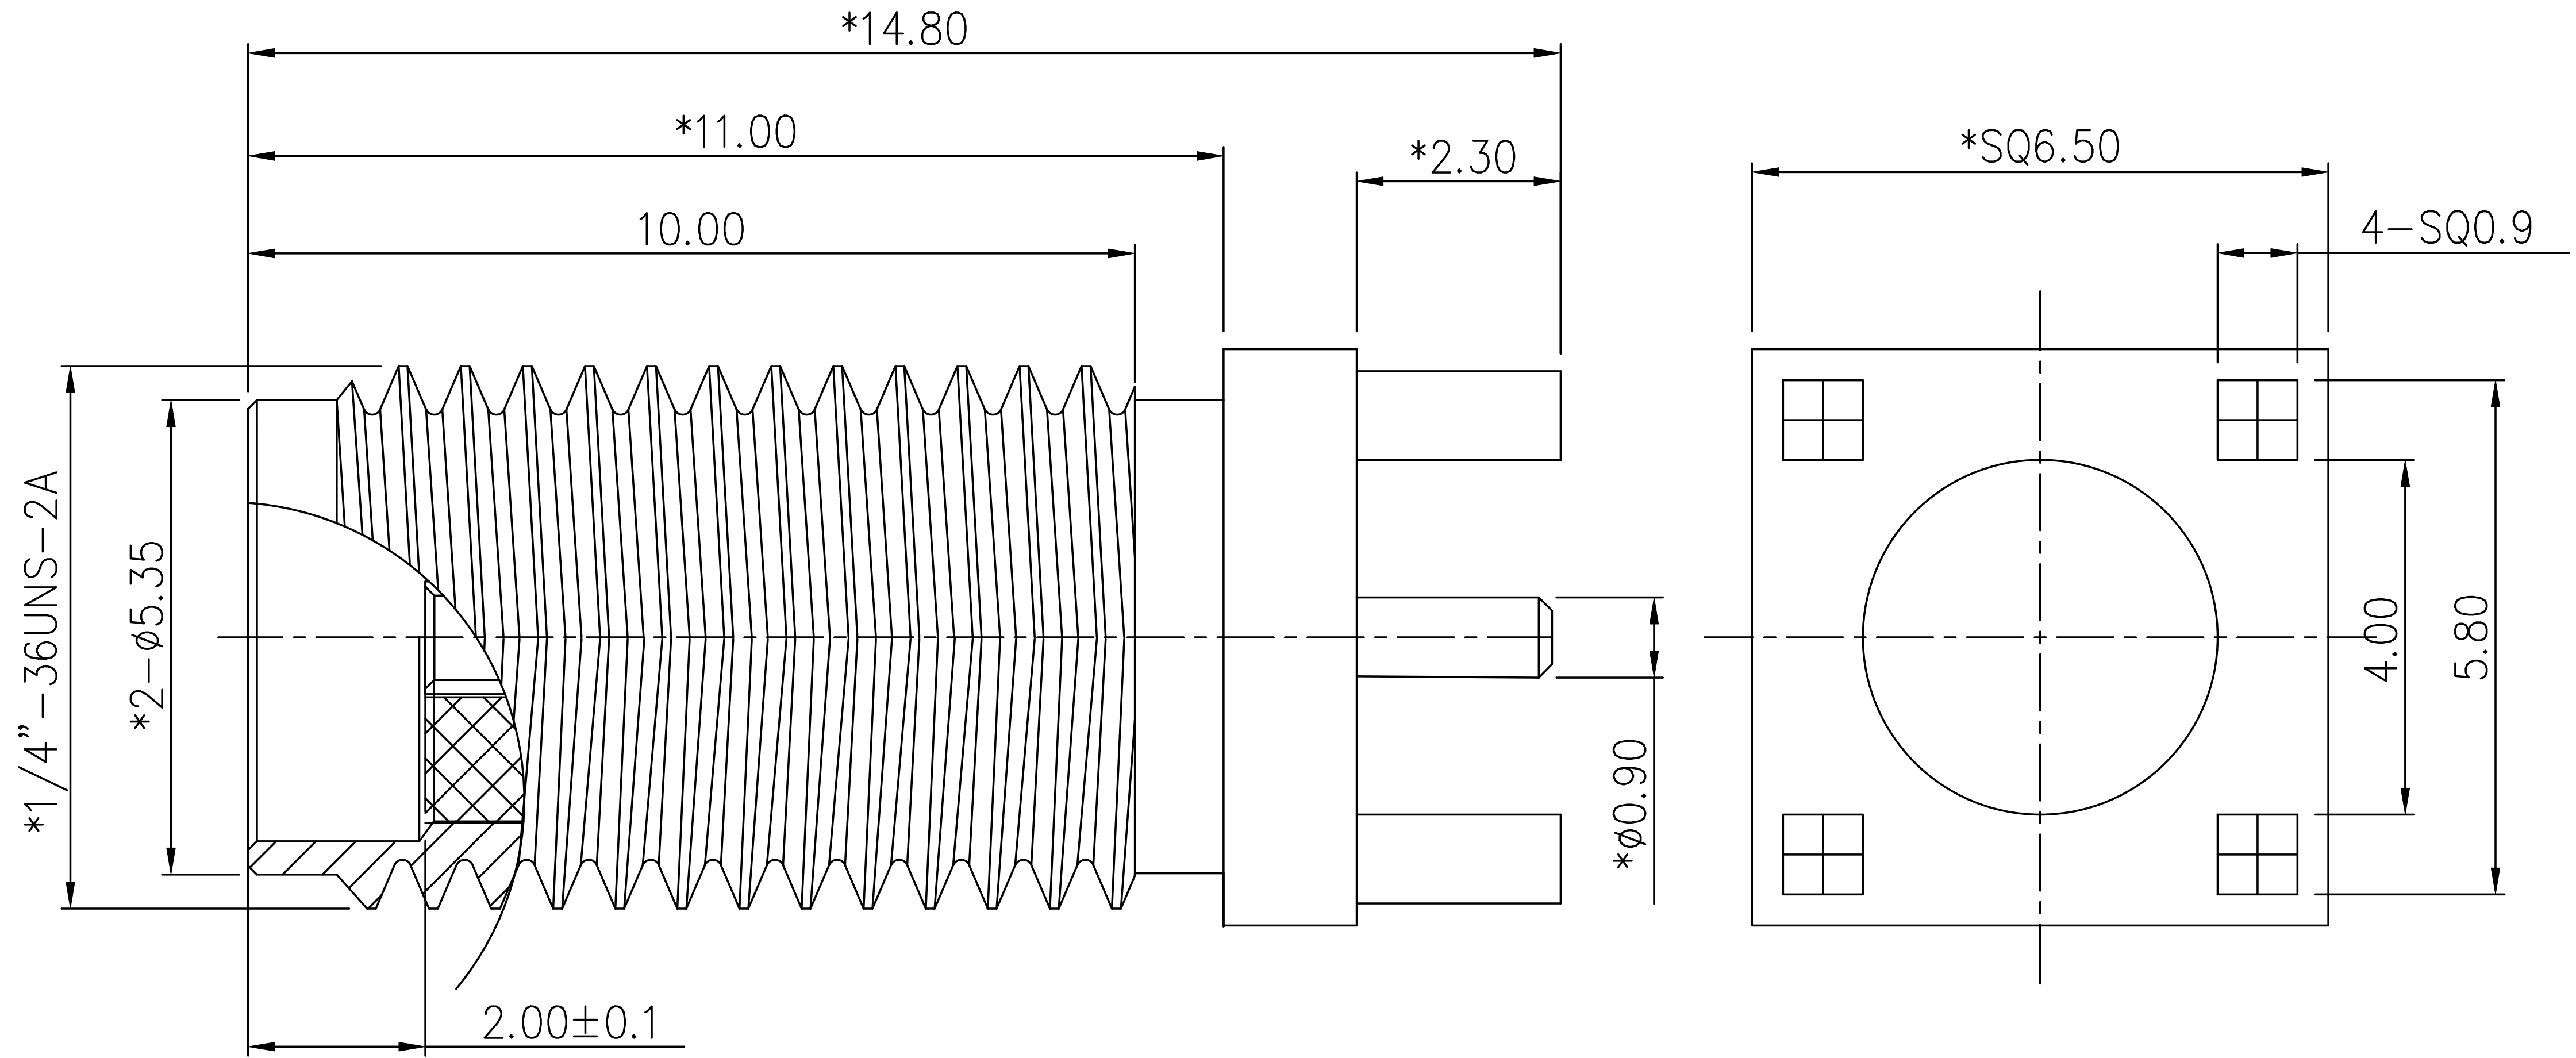

Model No.: SMA-KE901

Material: brass with gold-plated surface

SMA-KE female straight head (180 degrees) - external screw type, internal hole, 11 thread – square 4 feet

1. Electrical Characteristics

- 1.1 Impedance: 50 Ohm
- 1.2 Working Frequency: DC-3 GHz
- 1.3 S.W.R.: ≤1.5
- 1.4 Working Voltage: 335V/ Max
- 1.5 Insulation Resistance: 1000 Mohm
- 1.6 Contact Resistance: Center contact: 5 Mohm
- 1.7 External contact: ≤2.5 Mohm

2. Work Environment

- 2.1 Operating Temperature Range: -55°C ~ +125°C
- 2.2 Salt Spray Test: 48H

5	INSULATOR 2	PTFE WHITE	1
4	BOBY 2	BRASS GOLD-PLATING	1
3	CENTER PIN	BRASS GOLD-PLATING	1
2	INSULATOR 1	PTFE WHITE	1
1	BOBY 1	BRASS GOLD-PLATING	1
No.	Description	Material	Q'ty

Tolerance 未注公差		Part Name. 品名		
.X	±0.30	SMA-KE901		
.XX	±0.20	Material. 材		
.XXX	±0.10	Finish. 理		
未注角度公差 ±1°		Scale. 比例	1:1	Draw .
		REV. 版本/次	A/0	Check. 校
		Unite. 位	mm	App. 核准
			19.03.15	19.03.15
				19.03.15

**DreamLNK**® 深圳市骏晔科技有限公司  
SHENZHEN DREAMLNK TECHNOLOGY CO., LTD